




NEWLONG®

NEWLONG AUTOMATIC BAG CLOSING MACHINE

MODEL **A1-PB(DS-9C)**

SIMPLE, COST EFFICIENT PEDESTAL

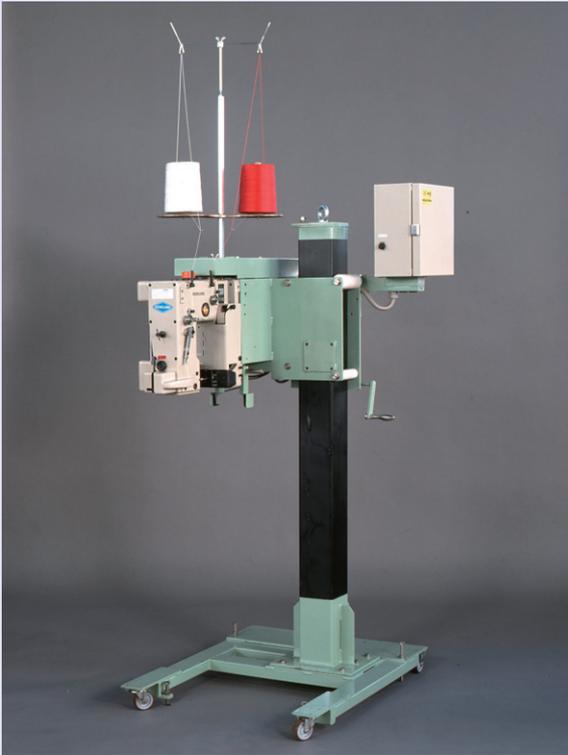

Model A1 - PB (DS-9C)



Model DS-9C

NEWLONG offers the latest in bag closing technology with the A1-PB height adjustable pillar and DS-9C high speed, oil enclosed sewing head. Available for both plain sewn and crepe-tape bound closure. This closing system can be used with a range of NEWLONG conveyors or an existing conveyor.

SPECIFICATIONS

Sewing Head Height	720 -1,220 mm from floor to needle
Brake Moter	4P , 3 Phase, 0.75KW or 0.4KW depends on conveyor speed
Start/Stop	Photo-switch
Sewing Hard	Model DS-9C
Max. Speed	2,700 r.p.m.
Stitch Width	7- 10.5 mm (standard setting 10 mm)
Stitch Type	Single Needle, Double Thread Chain Stitch (single thread available by special order)
Cutter Type	Air Cylinder Driven Guillotine Cutter
Air Pressure	4 kg/cm ²
Air Consumption	3.5 Nl/min.
Lubrication System	Automatic Oil Bath System (Recommended Oil : Shell Tellus Oil #32)
Oil Feeding Volume	1,740 cc (approx.)
Machine Pulley Dia.	100 mm, Variable speed pulley available by special order
Needle Type	DR-H30 #26
Thread	Synthetic or Cotton, 20/6, 20/9

*Crepe-tape stand and binder are not included as a standard supply of plain sewn closure. Please specify plain sewn closure or crepe-tape bound closure when ordering.

PACKING INFRMATION

Model	A1-PB(DS-9C)	A1-PB(DS-9C) + CM4900-3	A1-PB(DS-9C) + CM4900-1	A1-PB(DS-9C) + CP4900
Net Weight (approx.)	250kg	320kg	280kg	300kg
Gross Weight (approx.)	350kg	450kg	380kg	430kg
Measurement (approx.)	2.4M ³	3.2M ³	2.5M ³	2.8M ³

*Specifications subject to change without prior notice.

NEWLONG MACHINE WORKS, LTD.


MODEL CM4900-3, CM4900-1 AND MODEL CP4900 NEWLONG AUTOMATIC INFEED DEVICES

Automatic infeed devices, Model CM4900-3, CM4900-1 and CP4900 can be mounted on Model A1-PB (DS-9C) pedestal type bag closing machine.


Infeed Speed : Standard 10 m/min. Please specify conveyor speed when ordering.
Induction Motor : 0.2KW, 4P, 3 Phase. Please specify voltage and hertz when ordering.




MODEL CM4900-3
Automatic Infeed and Bag Top Trimming Device for crepe-tape bound closure on paper bags.
Crepe-Tape Width : Standard 55 mm, other width available.

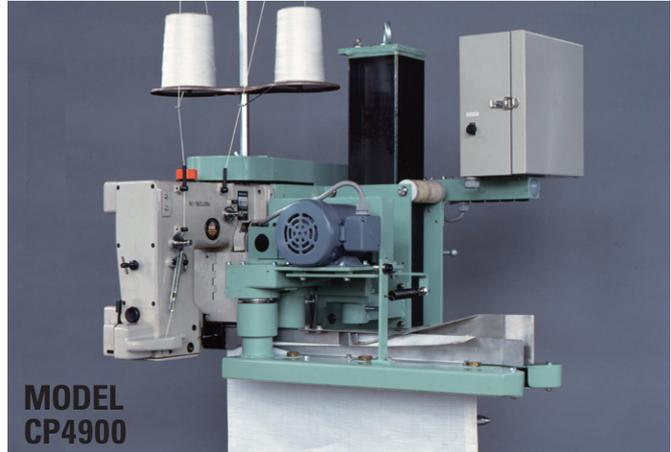

MODEL CP4900
Automatic Infeed and Bag Top Folding Device for plain sewn closure on PP/PE woven cloth bags.
Bag Top Empty Space Required for Folding : 170-200 mm
Bag Top Folding Depth : 30-60 mm

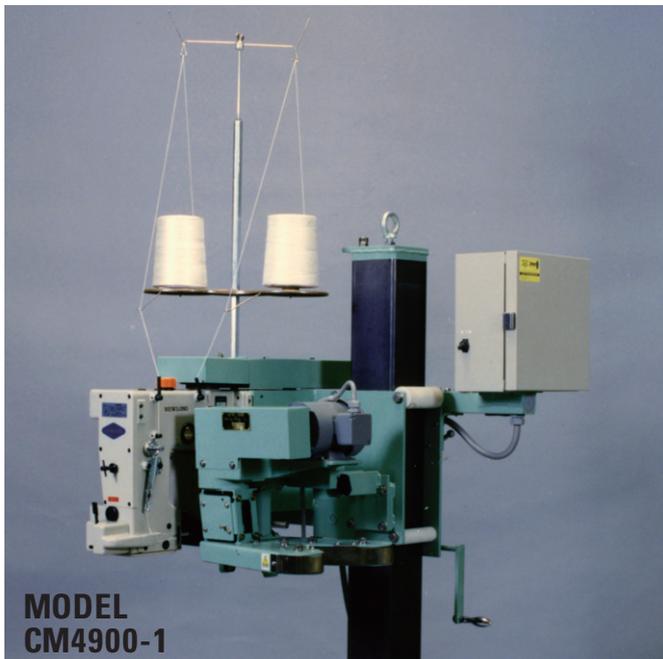

MODEL CM4900-1
Automatic Infeed Device for plain sewn closure on paper bags and PP/PE woven cloth bags.

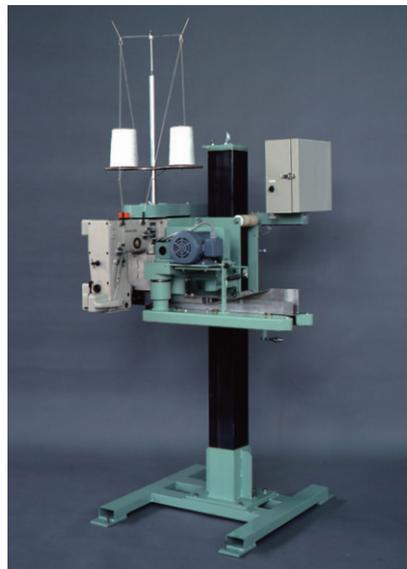

Model
A1-PB+CP4900

NEWLONG PACKAGING MACHINERY
(BEIJING) CO., LTD. for bag closing machine
ISO 9001



NEWLONG MACHINE WORKS, LTD.

HEAD OFFICE: 14-14, Matsugaya 1-chome, Taito-ku, Tokyo 111-0036, Japan

Fax:(81) 3-3843-0260 Tel:(81) 3-3843-0269

OVERSEAS OFFICE: NEWLONG PACKAGING MACHINERY (Beijing) CO., LTD.
NEWLONG PACKAGING MACHINERY (Shanghai) CO., LTD.
NEWLONG TAIWAN MACHINE CO., LTD.
NEWLONG SINGAPORE PTE.LTD.
NEWLONG MALAYSIA SDN.BHD. (Selangor)
NEWLONG MALAYSIA SDN.BHD. (Johor Bahru)
PT NEWLONG INDONESIA
NEWLONG (Thailand) LTD.
NEWLONG FZE (Dubai)
NEWLONG HOLLAND B. V.
AMERICAN-NEWLONG, INC.
NEWLONG DE MEXICO S. A. DE C. V.
AGENT IN BRAZIL: NEWLONG HASEBRAS MAQUINAS INDUSTRIAIS LTDA.
NEWLONG LATIN, INC. (Miami)
KOREA SILLA MACHINE WORKS, LTD

Fax:(86) 10-6127-2475 Tel:(86) 10-6127-1688
Fax:(86) 21-6432-5512 Tel:(86) 21-6432-5955
Fax:(886) 2-8512-2672 Tel:(886) 2-2276-2297
Fax:(65) 6265-1994 Tel:(65) 6265-0901
Fax:(60) 3-7804-7099 Tel:(60) 3-7805-2988
Fax:(60) 7-356-0257 Tel:(60) 7-356-0254
Fax:(62) 21-7919-5947 Tel:(62) 21-7919-5945
Fax:(66) 2-391-5508 Tel:(66) 2-391-1171
Fax:(971) 4-881-9882 Tel:(971) 4-881-7188
Fax:(31) 20-653-2416 Tel:(31) 20-653-2350
Fax:(1) 317-786-5225 Tel:(1) 317-787-9421
Fax:(52) 33-3344-8084 Tel:(52) 33-3344-8086
Fax:(55) 11-5073-9084 Tel:(55) 11-5073-9744
Fax:(1) 305-406-1039 Tel:(1) 305-406-1038
Fax:(82) 2-489-2152 Tel:(82) 2-489-1953

Home Page <http://www.newlong.com/>